


**200**



For moderate volume projects

**100%  
SYNTHETIC**  
*For Increased Strength*

**EACH ROLL:  
38" x 100'  
316 SQ FT**

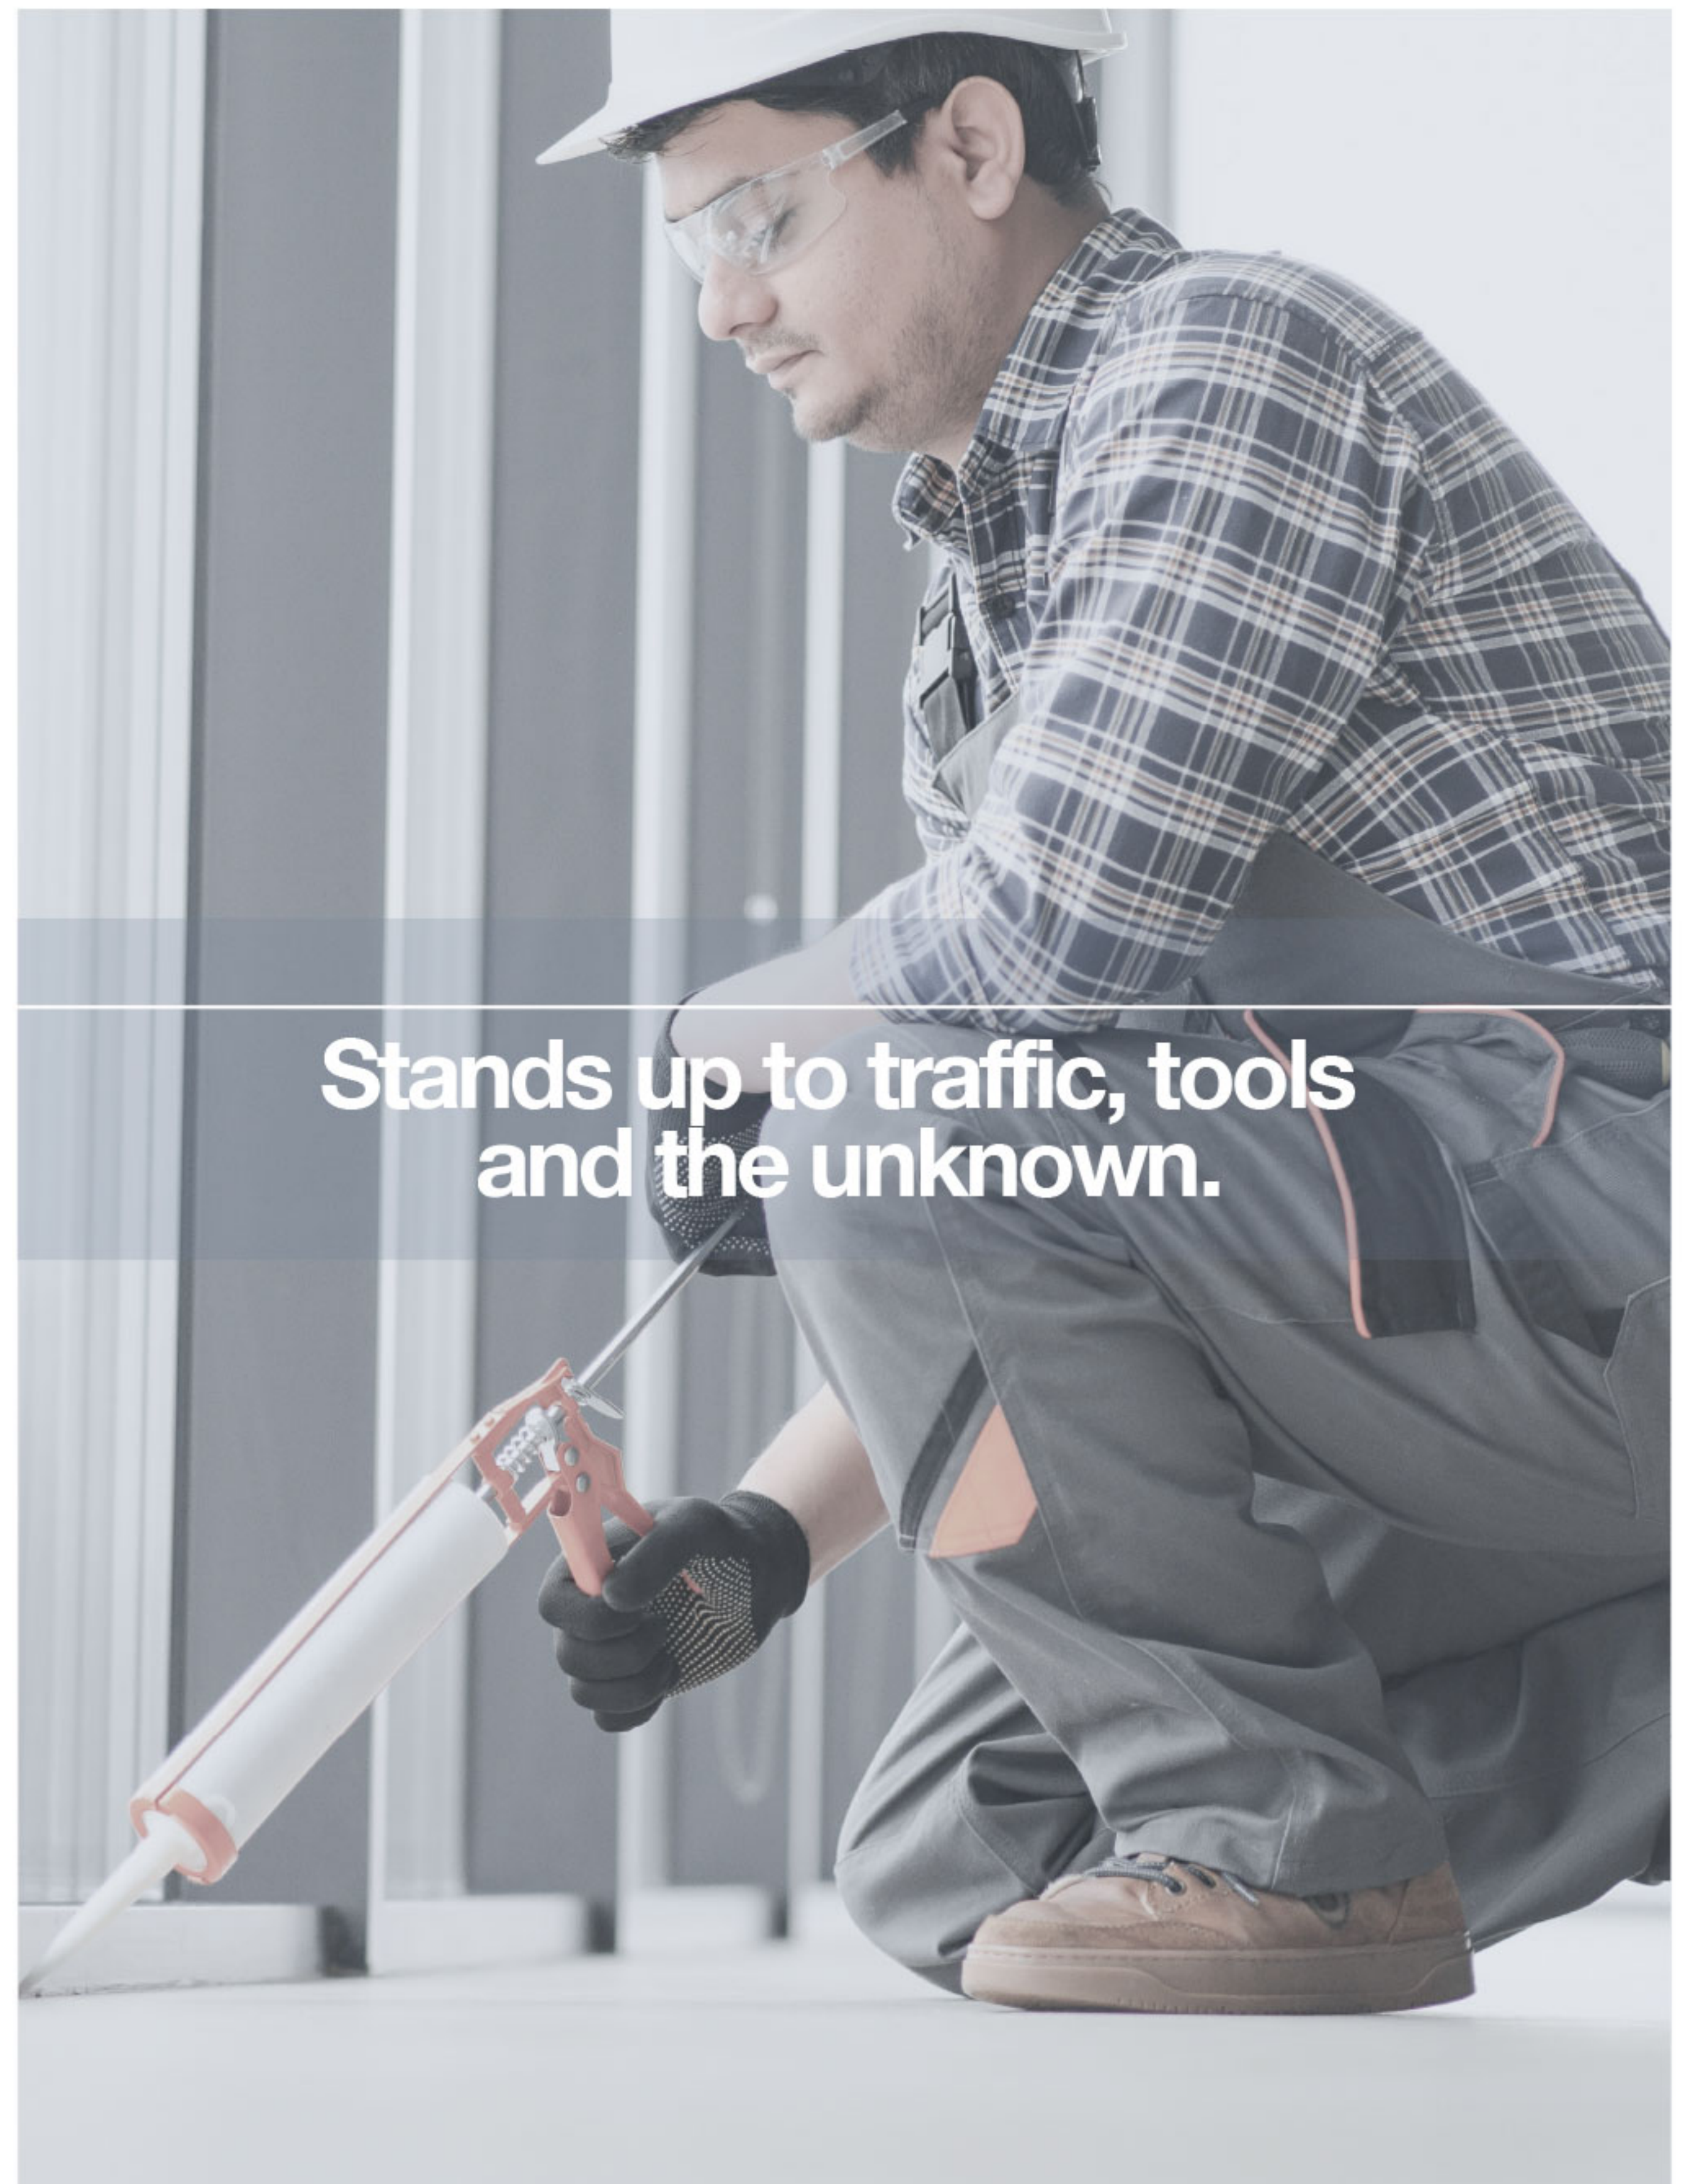

Stands up to traffic, tools  
and the unknown.

## High Performance & Floor Protection



**BREATHABLE**  
Will not trap moisture



**REPELLENT**  
Protects against spills



**ECO FRIENDLY**  
100% recyclable



**TEAR RESISTANT**  
Enhanced support


**LIGHTWEIGHT**  
Easy handling



**TRULAY™**  
Lay flat technology



**REGISTRATION**  
For accurate overlap

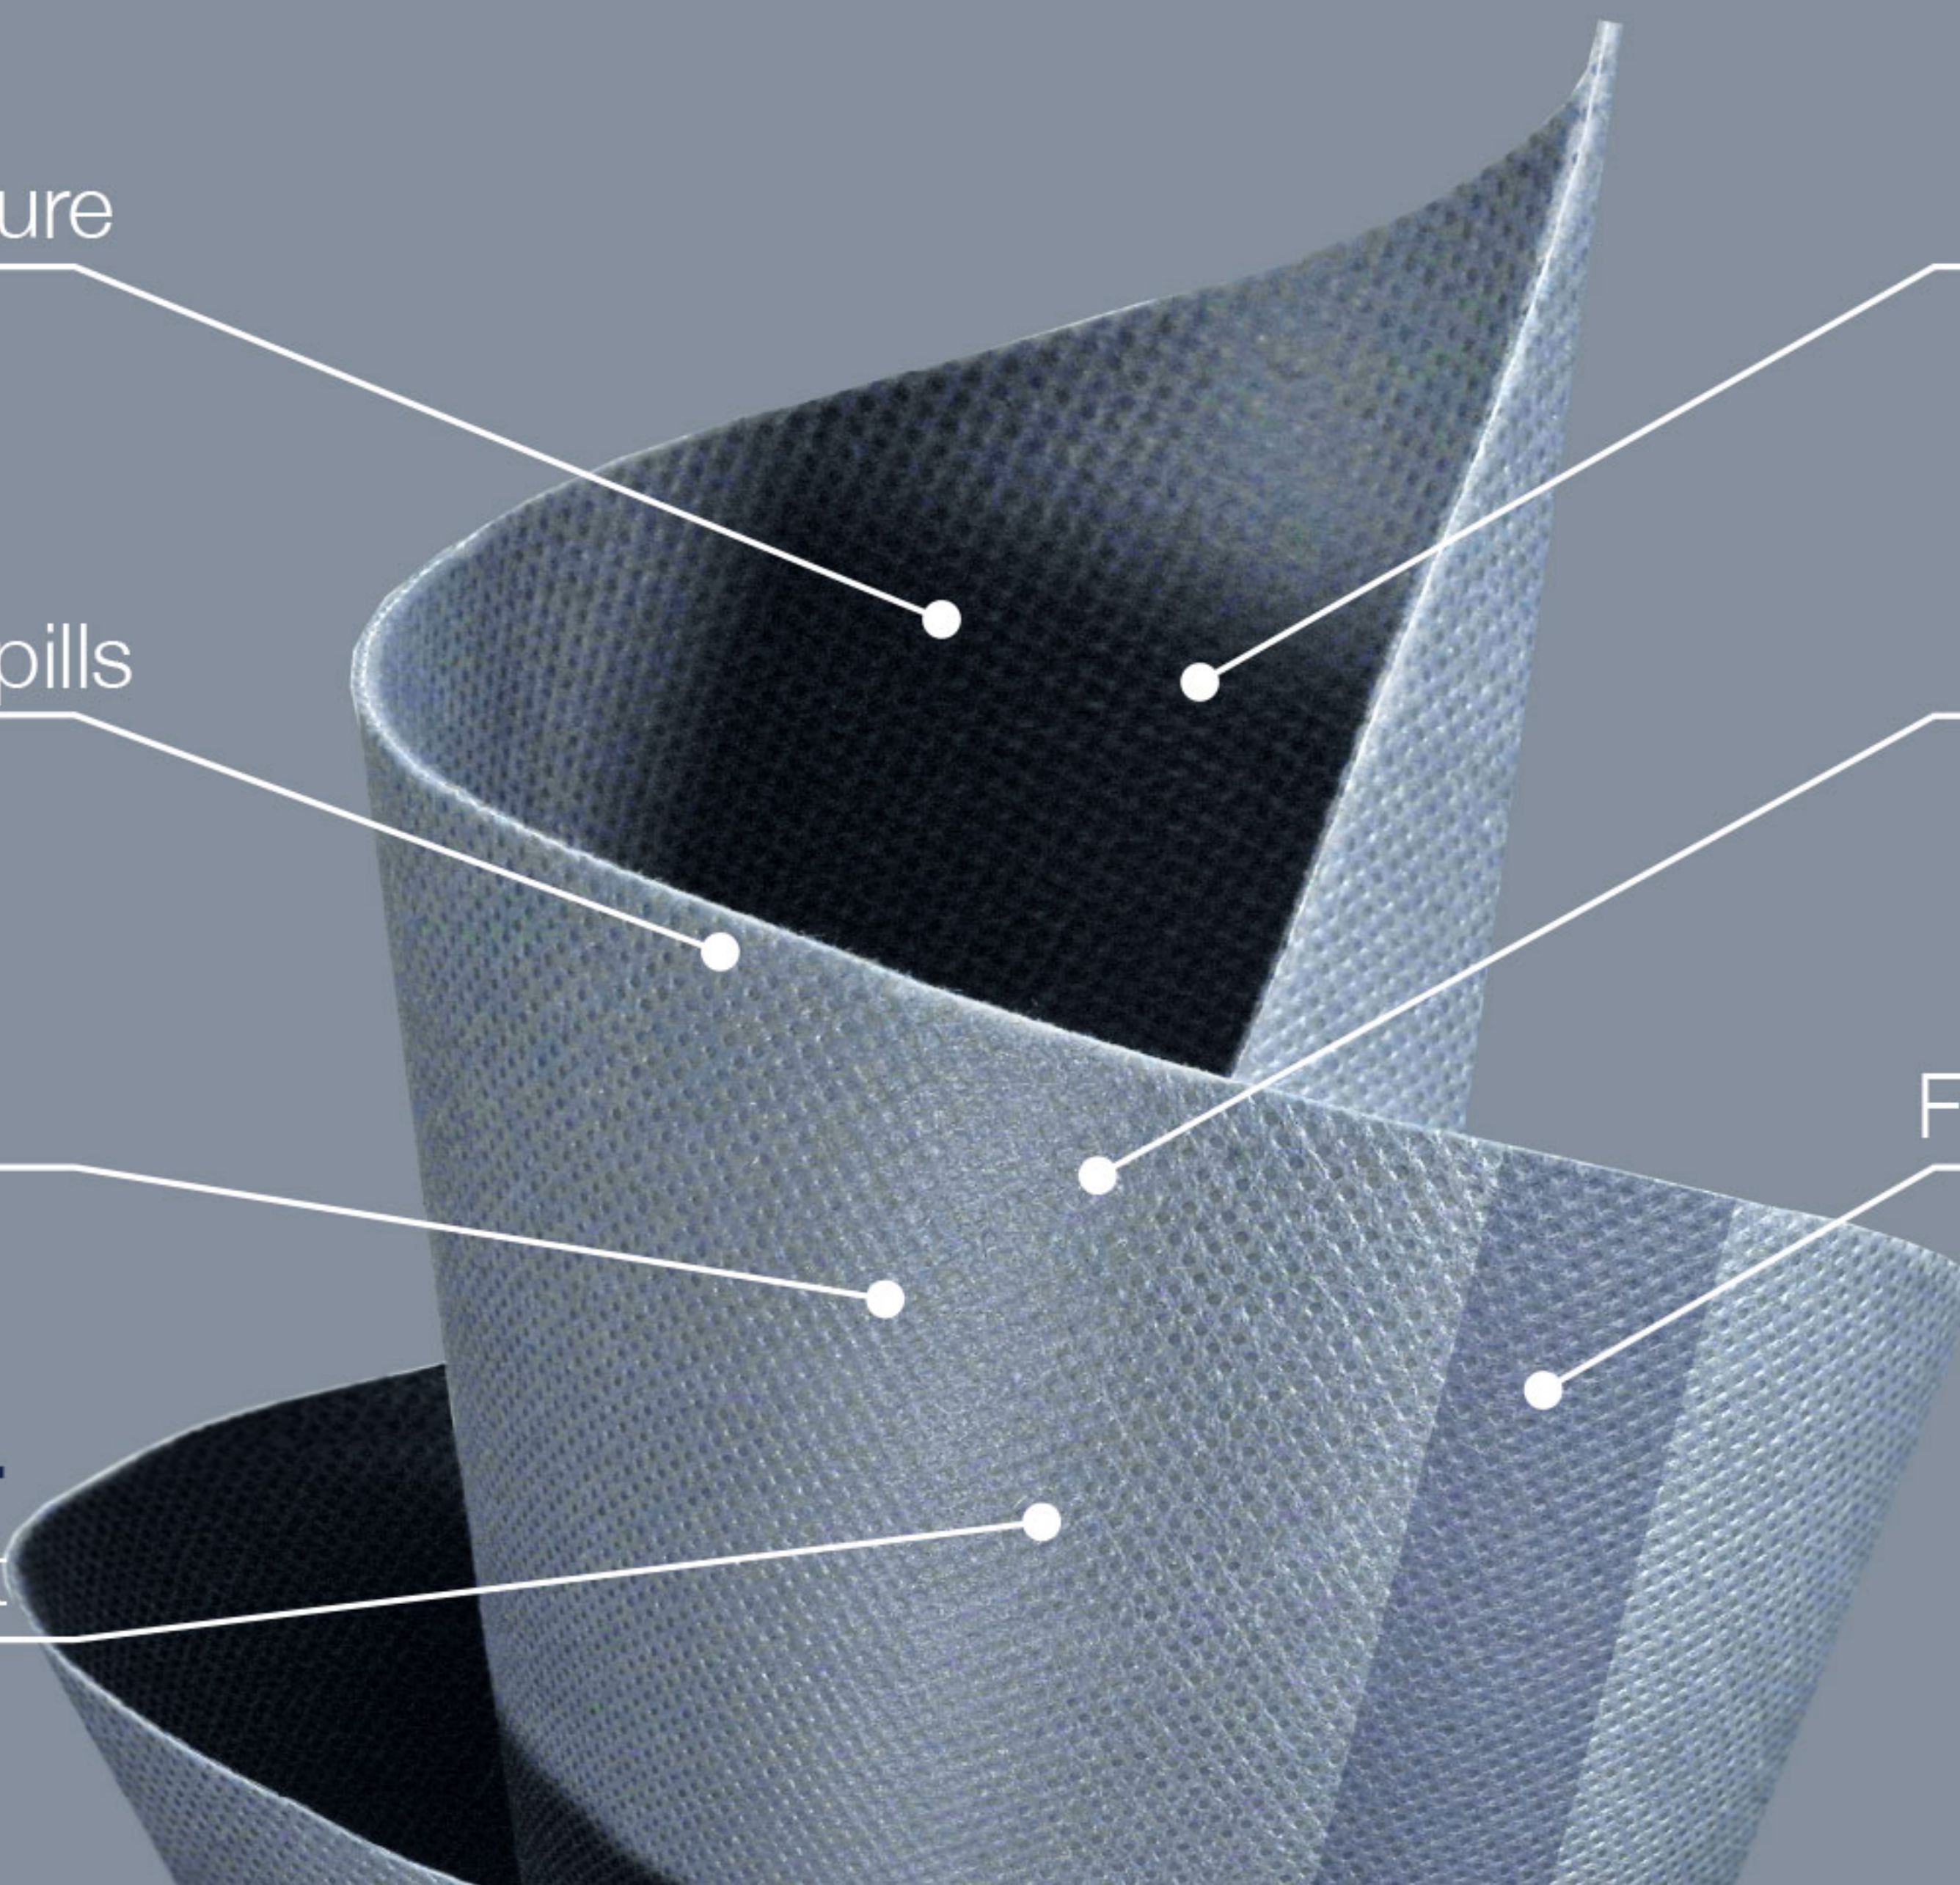



**PRODUCT SPECIFICATIONS**


**PRODUCT: BREATHABLE SYNTHETIC FABRIC**

PROPERTY	TEST METHOD	UNITS
Mil Thickness	ASTM D1777	<b>38 Mils</b>
Basis Weight	ASTM D3776-09	6.38 OSY
MD Tensile Strength @peak	ASTM D5034-09	101.56 Lbs
CD Tensile Strength @peak	ASTM D5034-09	96.84 Lbs
MD Elongation @peak	ASTM D5034-09	116.1%
CD Elongation @peak	ASTM D5034-09	152.8%
Air permeability	ASTM D 737:2018	0.697cfm
	Pressure: 125pa	0.697cfm
Trapezoidal tear MD	ASTM D 3787: 2016	54.85 lbs.
Trapezoidal tear CD	ASTM D 3787: 2016	42.99 lbs.
Moisture Vapor	ASTM E 96/96M:2005	794.43 g/m2/day
Transmission rate	ASTM E 96/96M:2005	794.43 g/m2/day
<b>HYDRO HEAD</b>	NWSP 080.6.RO. (15)	344.35


Learn more at  
[overwrap.net](http://overwrap.net)



**Safeguard what's underneath from scratches, dents, dings and moisture**

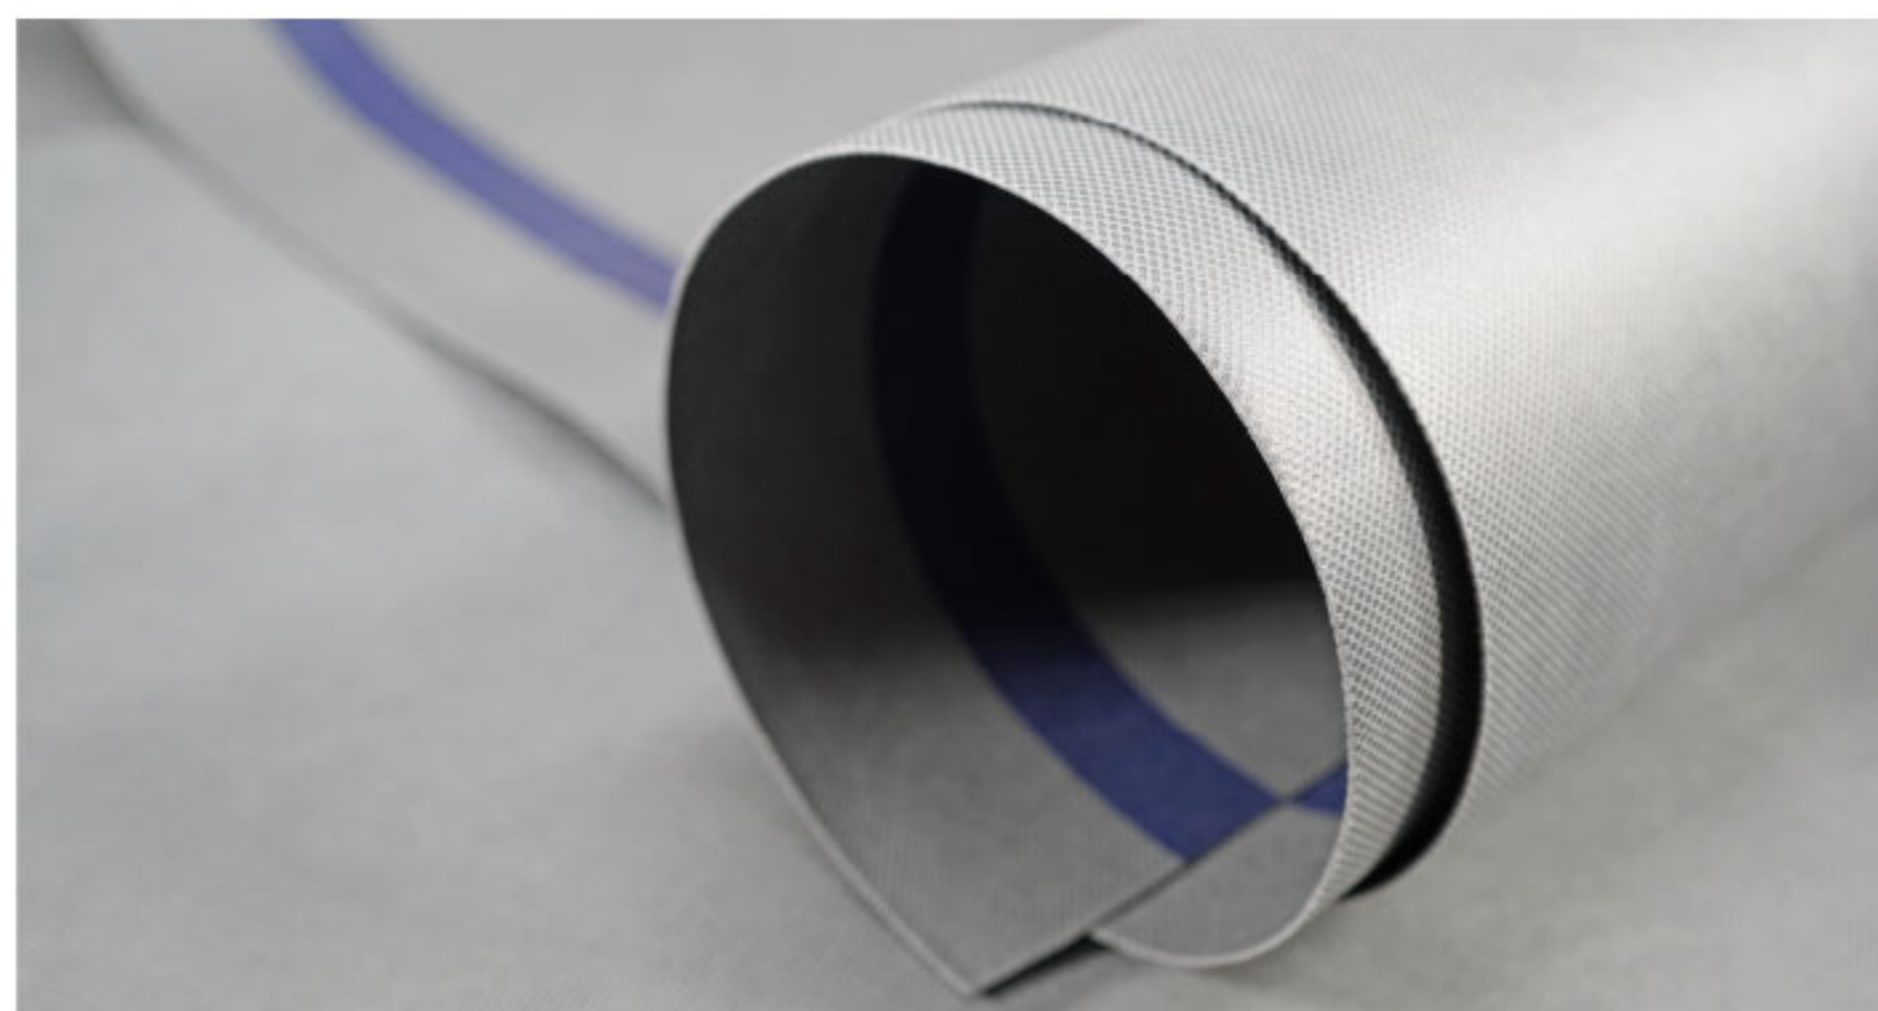

EASY INSTALL

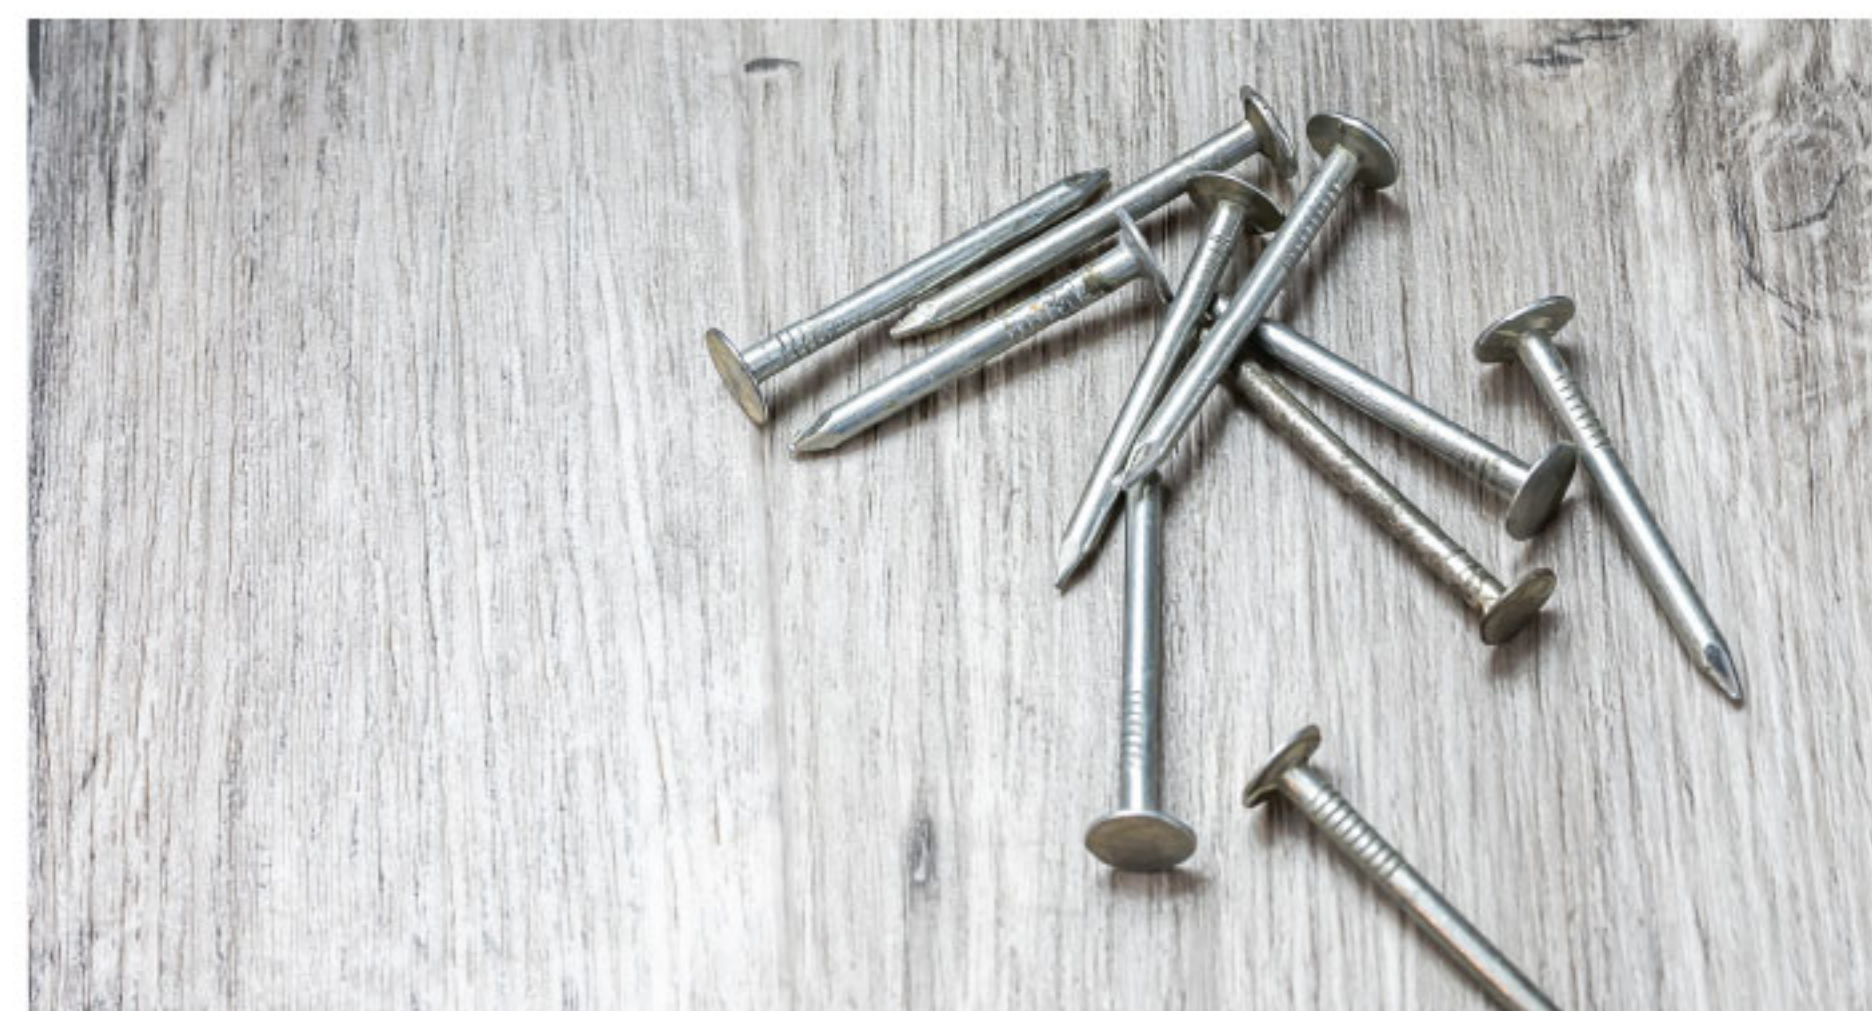

PROTECTS SURFACE



EASY CLEAN-UP

**DESIGNED TO PROTECT**

- Carpet Tile
- Carpet
- Sheet Vinyl
- LVT
- Laminate Wood
- Polished Concrete
- Stained Concrete
- Terrazzo
- Resinous Floors
- Stone
- Tile



[overwrap.net](http://overwrap.net)

**Surface Performance Solutions**  
 800 West 5th Ave / Suite 212  
 Naperville IL 60563