

300



For busy, long term projects

100%
SYNTHETIC
For Increased Strength

EACH ROLL:
38" x 100'
316 SQ FT



Stands up to traffic, tools
and the unknown.

High Performance Floor Protection



BREATHABLE
Will not trap moisture



REPELLENT
Protects against spills




ECO FRIENDLY
100% recyclable



TEAR RESISTANT
Enhanced support


LIGHTWEIGHT
Easy handling

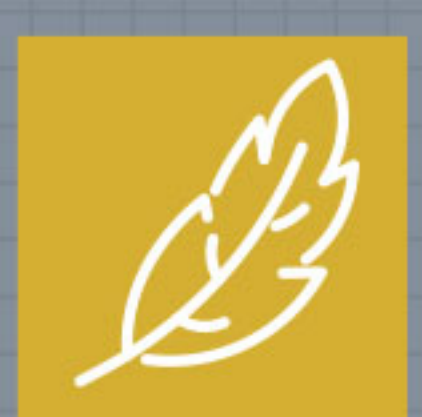

TRULAY™
Lay flat technology



REGISTRATION
For accurate overlap

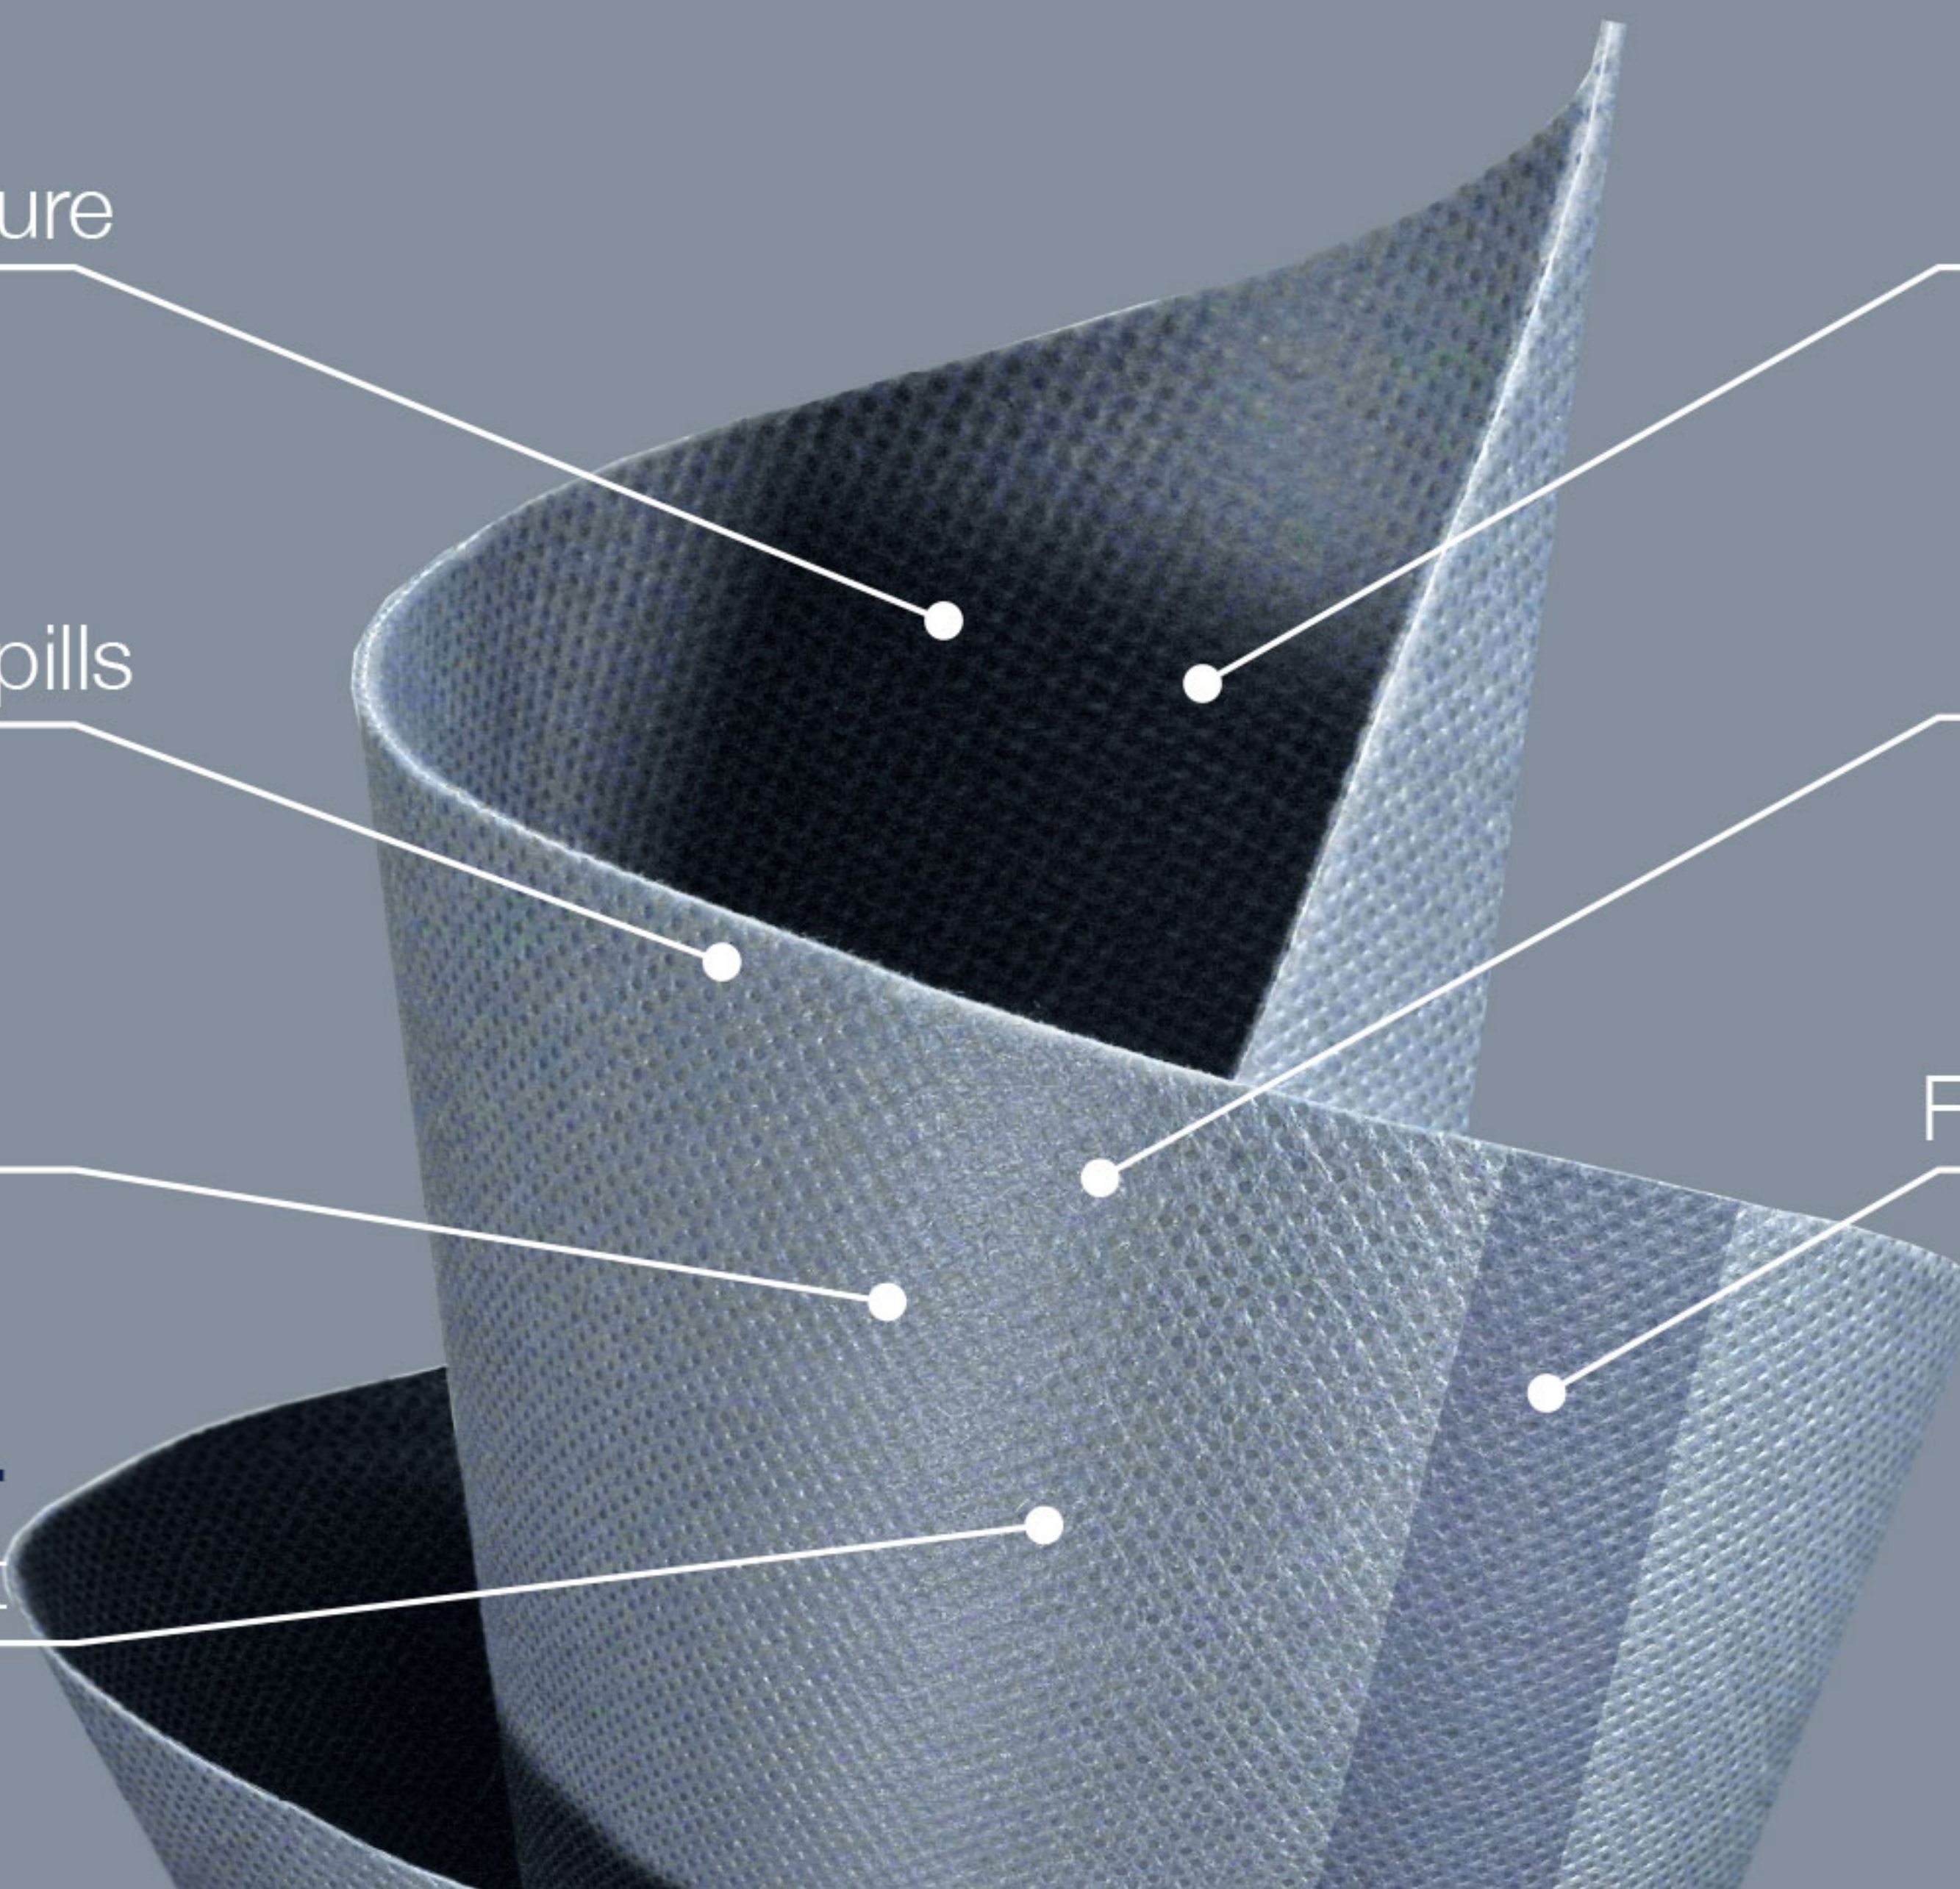

PRODUCT SPECIFICATIONS


PRODUCT: BREATHABLE SYNTHETIC FABRIC

PROPERTY	TEST METHOD	UNITS
Mil Thickness	ASTM D1777	43 Mils
Basis Weight	ASTM D3776-09	7.96 OSY
MD Tensile Strength @peak	ASTM D5034-09	101.16 Lbs
CD Tensile Strength @peak	ASTM D5034-09	101.39 Lbs
MD Elongation @peak	ASTM D5034-09	96.6%
CD Elongation @peak	ASTM D5034-09	118%
Air permeability	ASTM D 737:2018	0.65 cfm
	Pressure: 125pa	0.65 cfm
Trapezoidal tear MD	ASTM D 3787: 2016	53.11 lbs.
Trapezoidal tear CD	ASTM D 3787: 2016	45.07 lbs.
Moisture Vapor	ASTM E 96/96M:2005	732.38 g/m ² /day
Transmission rate	ASTM E 96/96M:2005	732.38 g/m ² /day
HYDRO HEAD	NWSP 080.6.RO. (15)	118.28


Learn more at
overwrap.net



Safeguard what's underneath from scratches, dents, dings and moisture

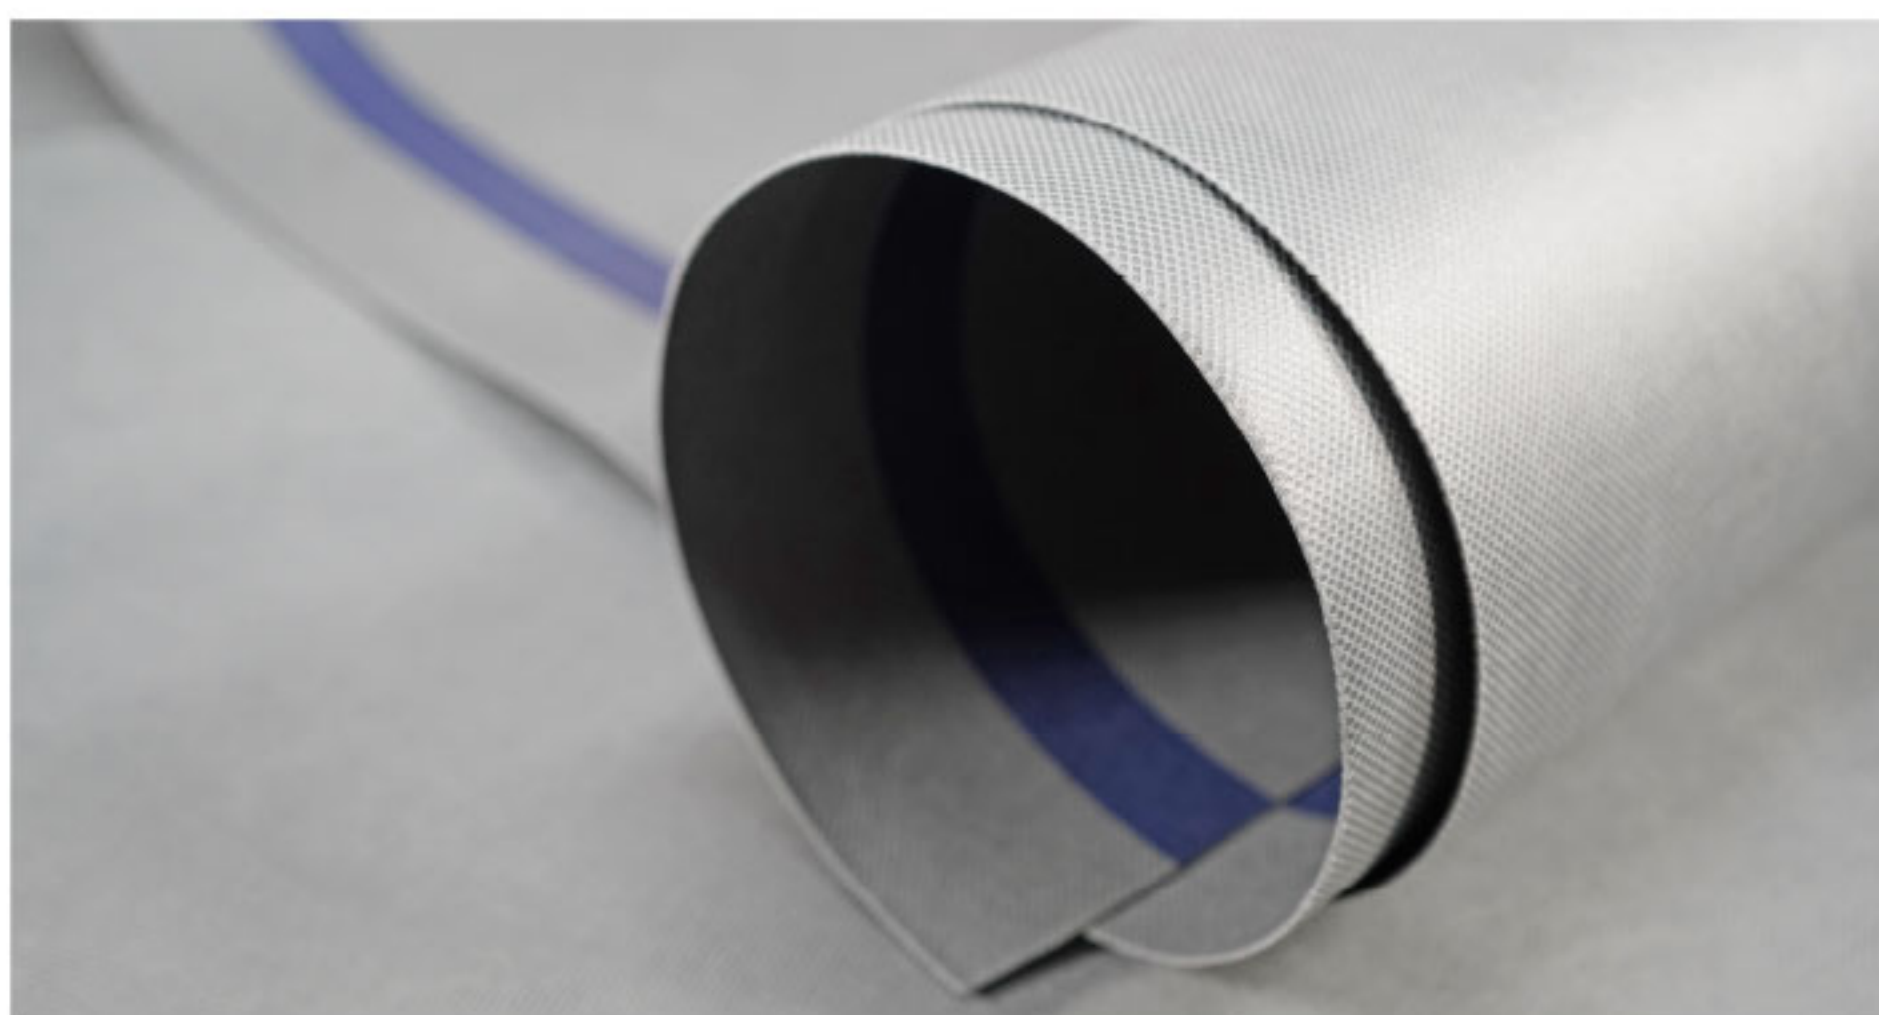

EASY INSTALL

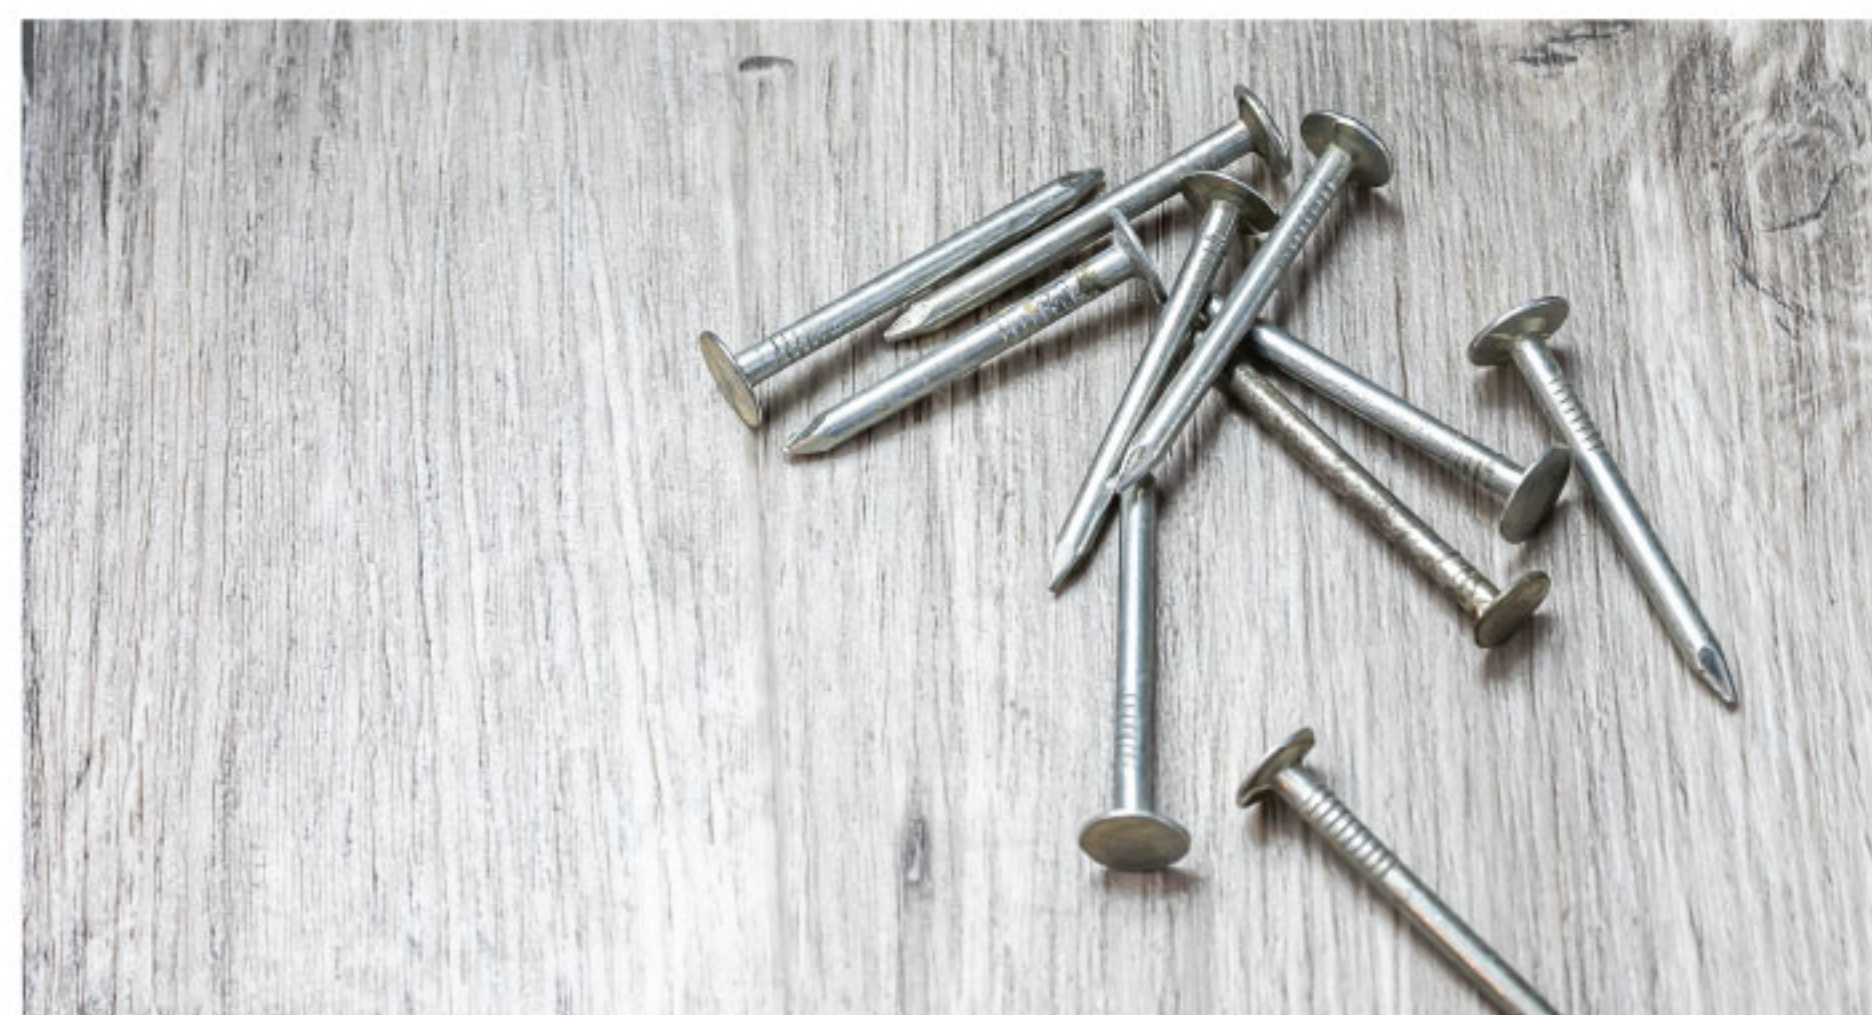


PROTECTS SURFACE



EASY CLEAN-UP

DESIGNED TO PROTECT

- Carpet Tile
- Carpet
- Sheet Vinyl
- LVT
- Laminate Wood
- Polished Concrete
- Stained Concrete
- Terrazzo
- Resinous Floors
- Stone
- Tile

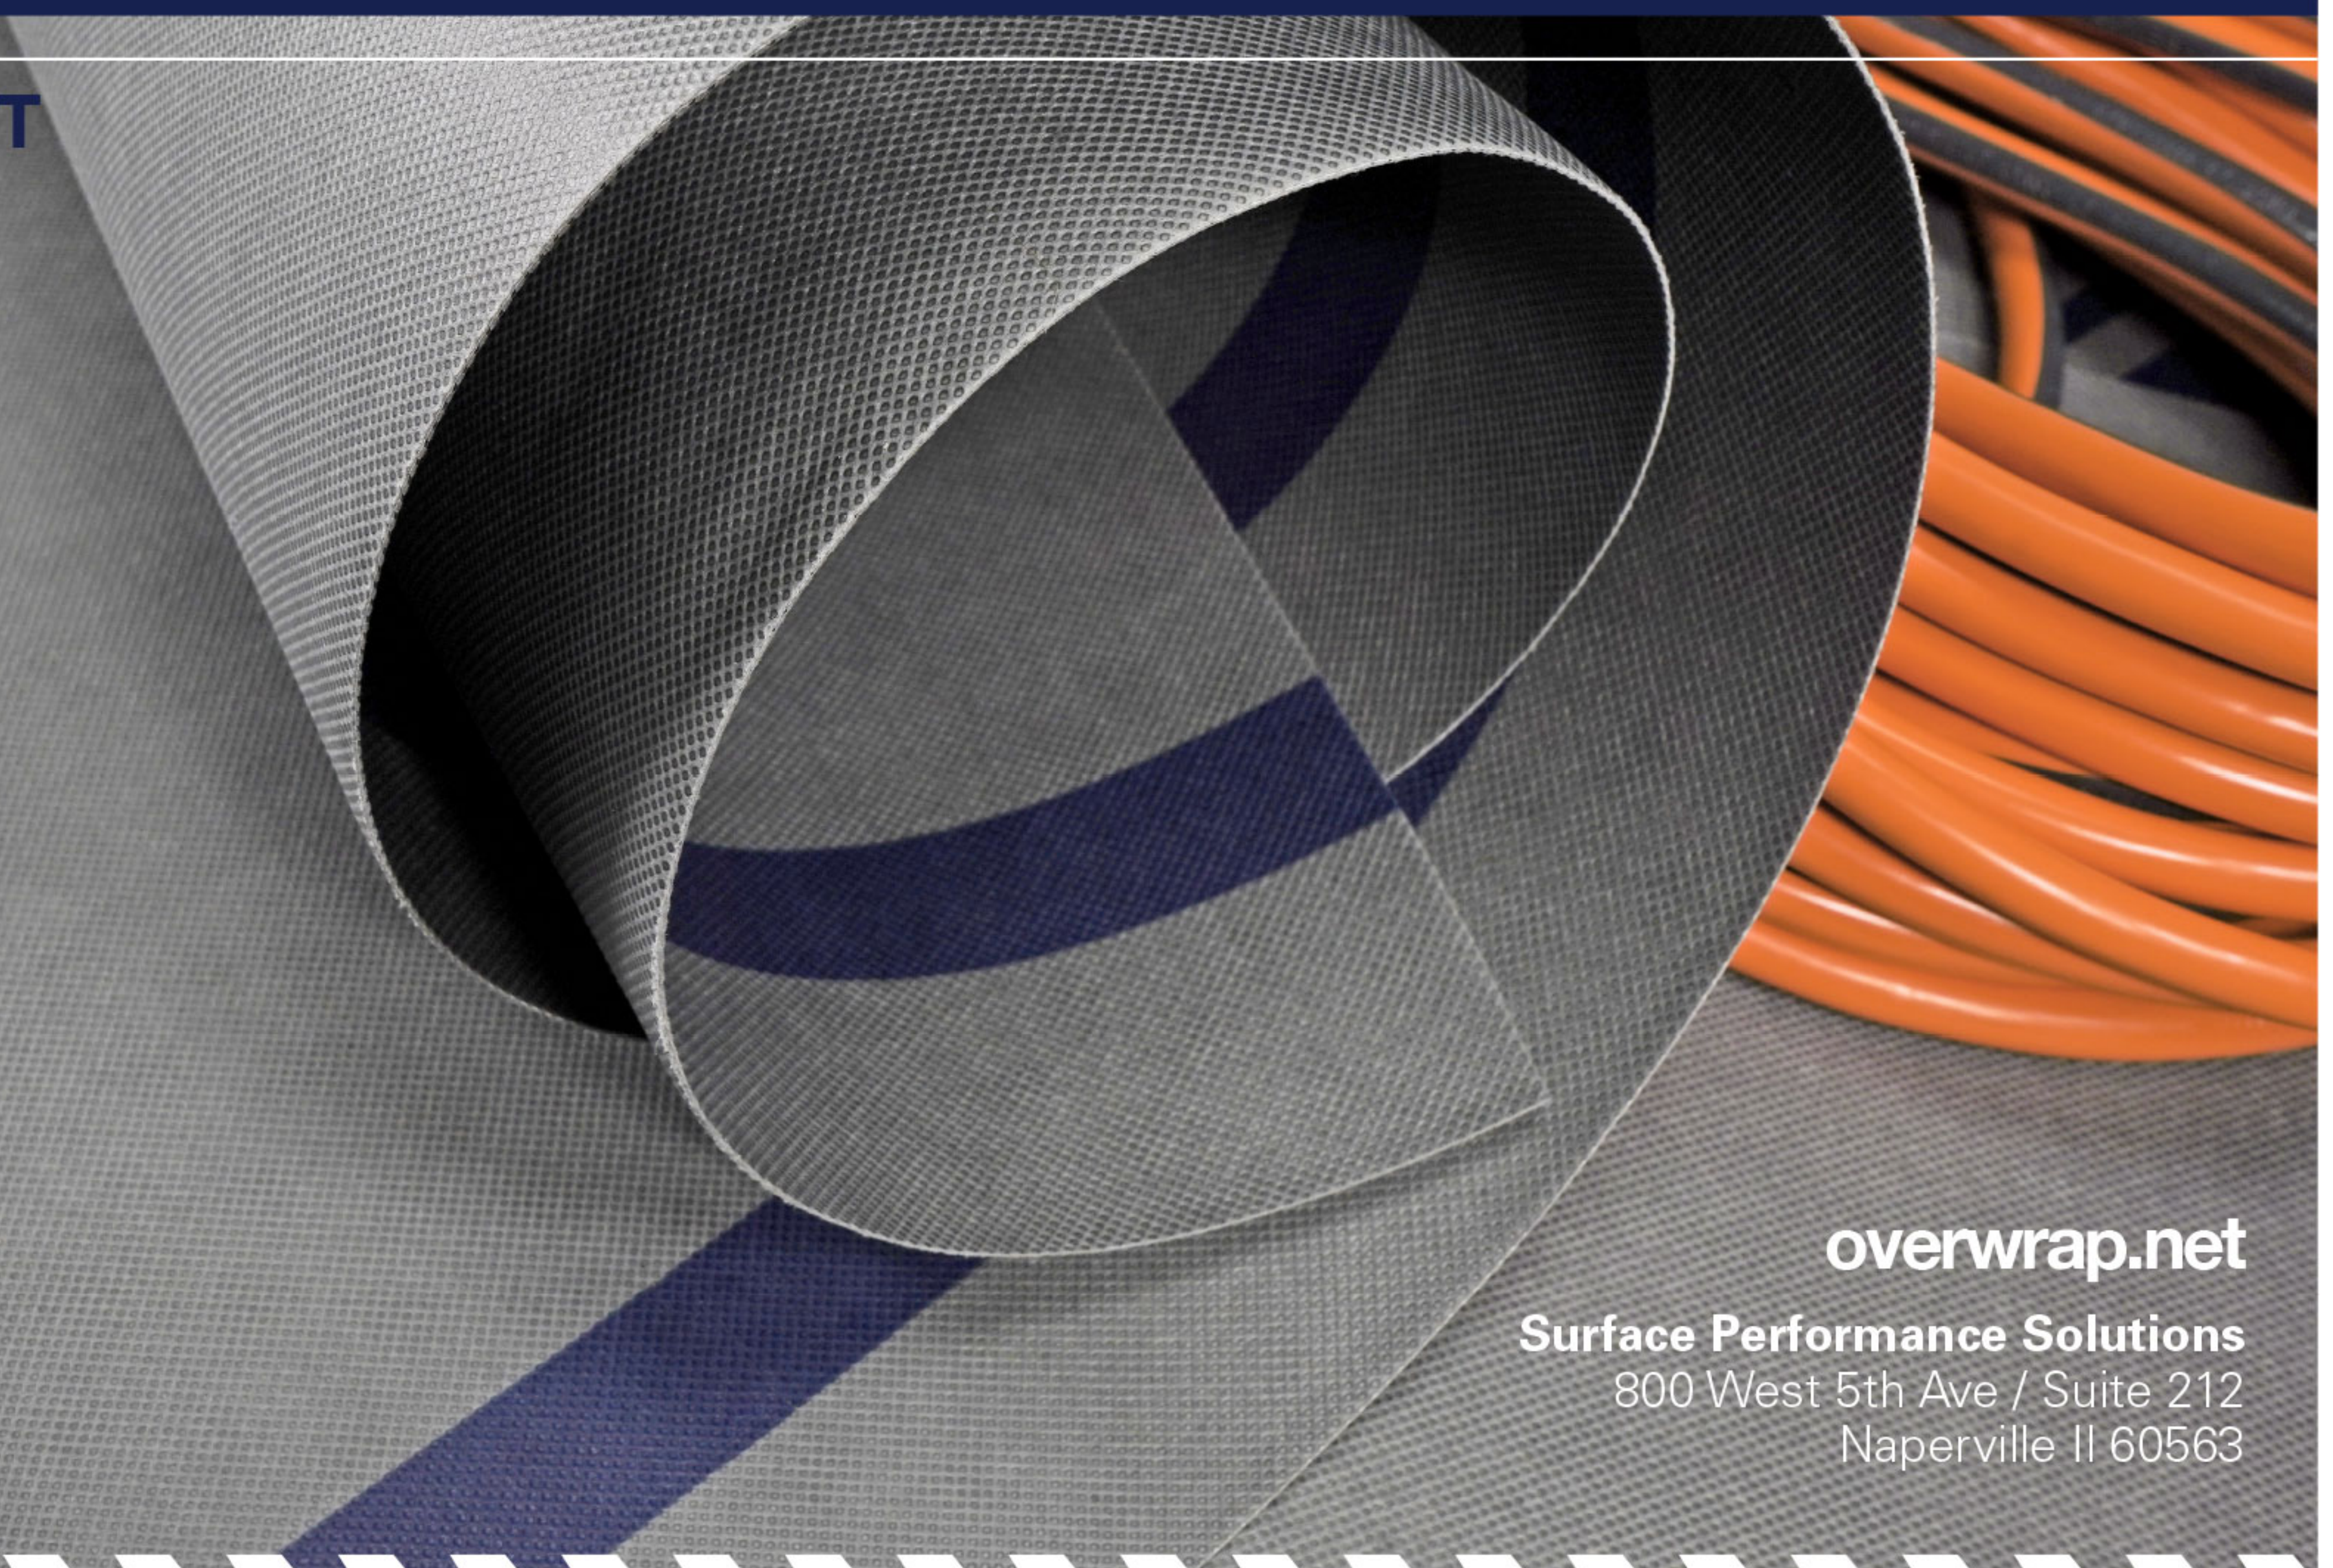

overwrap.net
Surface Performance Solutions
 800 West 5th Ave / Suite 212
 Naperville IL 60563